



### Standard



### Optional



**4S** 10°

	23870	17000	12100	9290	7480	6290	kg
	2.92	4.33	6.07	7.87	9.74	11.68	m
	7095	52620	37475	26675	20480	16490	lb
	15646	96"	14'2"	19'10"	25'9"	31'11"	ft

**6S** 10°

	23180	16000	11290	8520	6750	5445	4590	3980	kg	
	2.92	4.48	6.23	8.03	9.89	11.84	13.88	16.01	m	
	7705	51100	35270	24885	18780	14880	12000	10115	8770	lb
	16985	96"	14'8"	20'5"	26'4"	32'5"	38'10"	45'6"	52'6"	ft

**8S** 10°

	22680	15050	10500	7850	6130	4925	4085	3465	3015	2670	kg
	2.92	4.68	6.43	8.23	10.09	12.04	14.08	16.22	18.42	20.68	m
	8255	50000	33175	23145	17305	13510	10855	9005	7635	6645	lb
	18195	96"	15'4"	21'1"	27'	33'1"	39'6"	46'2"	53'2"	60'5"	ft

**9S** 10°

	22000	14500	10200	7610	5890	4730	3890	3310	2820	2510	2000	kg	
	2.92	4.75	6.50	8.30	10.16	12.10	14.14	16.28	18.48	20.75	23.10	m	
	8500	48500	31965	22485	16775	12985	10425	8575	7295	6215	5530	lb	
	18735	96"	15'7"	21'3"	27'2"	33'3"	39'8"	46'4"	53'4"	60'7"	68'	75'9"	ft

**4S+JIB 4S** 20°


		3500	3150	2830	2570	2360	kg
		14.69	16.13	17.70	19.31	20.94	m
	8485	7715	6940	6235	5665	5200	lb
	18635	48'2"	52'11"	58'	63'4"	68'8"	ft

	9000	6080	4250	3250	2600	kg
	6.46	7.90	9.47	11.00	12.71	m
	19840	13400	9365	7160	5730	lb
	21'2"	25'11"	31'	36'1"	41'8"	ft



MODEL							
	ixm	(°)	mm	mm	mm	mm	t
4S	73,61	580	2485	2500	1740	8710	26-32
6S	71,68	580	2485	2500	1775	8710	26-32
8S	70,43	580	2485	2500	1775	8710	26-32
9S	68,87	580	2485	2550	1775	8710	26-32
4S+JIB 4S	73,61	580	2670	2500	1990	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	532600	580	98	98	69	343	57300 70500
6S	518640	580	98	98	70	343	57300 70500
8S	509600	580	98	98	70	343	57300 70500
9S	498310	580	98	100	70	343	57300 70500
4S+JIB 4S	532600	580	105	98	78	343	57300 70500


### 6S+JIB 4S LIGHT

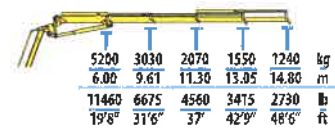


### 6S+JIB 4S HEAVY DUTY

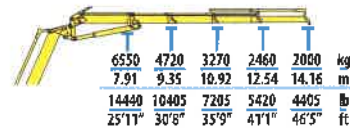



### 6S+JIB 6S LIGHT

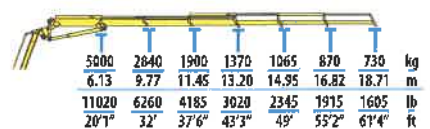


### 6S+JIB 6S HEAVY DUTY

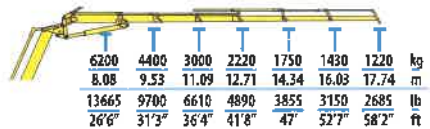

### 8S+JIB 4S

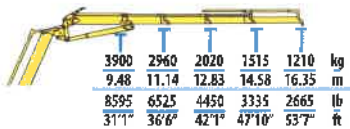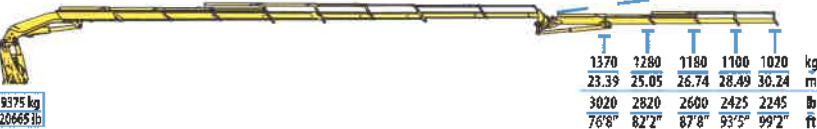

### 8S+JIB 6S



MODEL							
	tcm	(°)	mm	mm	mm	mm	t
6S+JIB 4S LIGHT	71,68	580	2670	2500	1990	8710	26-32
6S+JIB 4S HD	71,68	580	2670	2500	1990	8710	26-32
6S+JIB 6S LIGHT	71,68	580	2670	2500	1990	8710	26-32
6S+JIB 6S HD	71,68	580	2670	2500	1990	8710	26-32
8S+JIB 4S	70,43	580	2670	2500	1990	8710	26-32
8S+JIB 6S	70,43	580	2670	2500	1990	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S+JIB 4S LIGHT	518640	580	105	98	78	343	57300 76500
6S+JIB 4S HD	518640	580	105	98	78	343	57300 76500
6S+JIB 6S LIGHT	518640	580	105	98	78	343	57300 76500
6S+JIB 6S HD	518640	580	105	98	78	343	57300 76500
8S+JIB 4S	509600	580	105	98	78	343	57300 76800
8S+JIB 6S	509600	580	105	98	78	343	57300 76800